

## *Tnak inner surface polyethylene lining (DHF-COAT-PE-T)*

With DHF's polyethylene lining method (DHF-COAT-PE-T), powder resin thermally adheres to the tank inner surface, ensuring that any irregularities, such as projections inside the tank are fully coated, with no air bubbles created, in even tight corners. DHF's polyethylene lining method is ideal for various kinds of tanks in water treatment facilities, ion exchange resin towers and strainers in sea water piping.


### **Coating range**

---

<b>Tank Outer Diameter No</b>	Maximum 1,500mm
<b>Tank Length No</b>	Maximum 3,500mm



Polyethyleneinner lining for tank

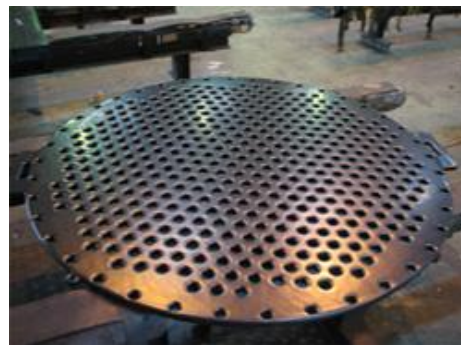

Polyethyleneinner lining filter